




### Monitor Features

- TFT Active Matrix
- NTSC/PAL Selectable
- 2 Position Switcher
- Mirror Mode, Horizontal Flip
- Includes Mounting Bracket and Power Supply
- FCC, CE

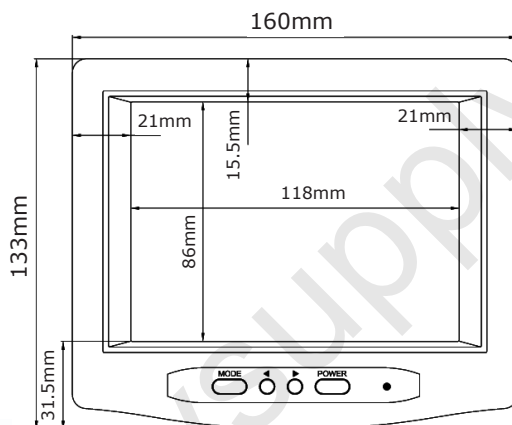

### Technical Specifications

#### Electrical

45M056XR	
Operating System	NTSC/ PAL auto selectable
Picture Size	5.6" diagonal
Resolution (H x V)	960 x 234 pixels
LCD Type	TFT active matrix, R.G.B. stripe
Dot Pitch (W x H)	0.119 x 0.357
Brightness	200 cd/m <sup>2</sup>
Contrast Ratio	150:1
Response Time	Tr: 15ms Tf: 20ms
Backlight	LED
Mirror Mode	On / Off
Horizontal Flip	On / Off
Input Signal	1Vp-p composite video at 75 Ohms
Video Angle	Left 75°, Right 75°, Up 55°, Down 55°
Power Source	12VDC +10%
Power Consumption	7W (max)

#### Environmental

Operation Temperature	-10° C ~ 50° C (14° F ~ 122° F)
Storage Temperature	-20° C ~ 60° C (-4° F ~ 140° F)

#### Mechanical

Dimensions W x H x D	160mm x 133mm x 30.1mm (6.29" x 5.23" x 1.18")
Weight	458g (1 lb)
External Controls	Mode A - Contrast, Brightness, Color, Tint (NTSC only), Audio Mode B - Contrast, Brightness, Color, Tint (NTSC only), Audio, Mirror Mode, NTSC/PAL
Connectors	Mini-phone jack/ Mini-phone plug to RCA plug adapter

#### Accessories

Included	Mounting bracket, power supply, 2 AV cables
----------	---

05/07/08 PDS-45M056XR Rev E

All data subject to change without notice.

### Videology® Imaging Solutions, Inc.



37M Lark Industrial Parkway  
Greenville, Rhode Island 02828 USA  
Tel: (401) 949 - 5332 Fax: (401) 949 - 5276  
North/South American Sales: Sales@videologyinc.com

### Videology® Imaging Solutions, Europe B.V.

Neutronenlaan 4  
NL-5405 NH Uden, Netherlands  
Tel: +31 (0) 413 256261 Fax: +31 (0) 413 251712

For design help, accessories or pricing, please contact:  
sales@avsupply or call: 1-858-565-1101

