

BL0202

2" x 2" Surface Mount LED Back Light

- Aii** Extremely consistent light over the entire active area of illumination.
- Aii** Integral M6 nut channel for easy mounting.



Ordering Information

Standard Product:
Shipped Next Day

BL0202-660C2

Configured for use with Ai power supply

BL0202-66024

BL0202-6601C

BL0202-WHI24

Configured for use with user supplied 24vDC Power Supply

Standard Product Variation:

Red & Infra-red: Shipped Within 2 Weeks

White: 3 Weeks **Blue & Green:** 4 Weeks

	Spectral wavelength	Optional power Compatibility	Optional Light Conditioning	Alternative Connector
BL0202	-	XXX	XX	X
	(blue) 470	IC	p ^ε	M12*
	(green) 520	IS	(Polarizer)	(IS: 5-pin male; IC/24: 4-pin male)
	(red) 660	C2		
	(infra-red) 880	C3		
	(white) WHI	C5		
		24		

IC = iCS (requires 24v power supply)

IS = ISU (24 volt PS required.)

C2 = Ai Connector


C3 = Pulsar 710 Connector

C5 = Pulsar 320 Connector

* Available with IC, IS, and 24v options only

ε = Polarizer is oriented perpendicular to the cable exit side of the light

Dimensional Information

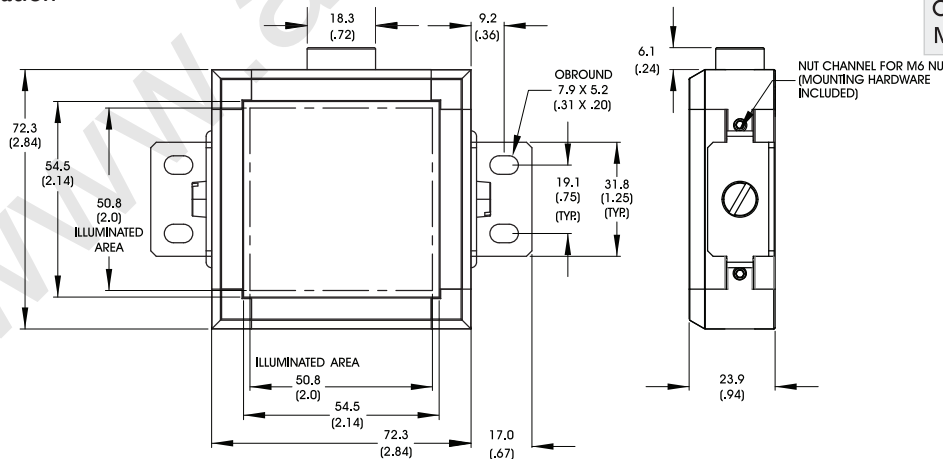

Click for Installation Models & Drawings

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	red	infra-red	white	
@24	80	80	120	120	80	mA

Standard Product Information

Weight: 368 g (13 oz)
 Finish: Black Anodized
 Operating Temperature: 0-60° C
 Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other visic