


EZN1240-A

2-Megapixel IR & WDR,
Outdoor Bullet Network Camera

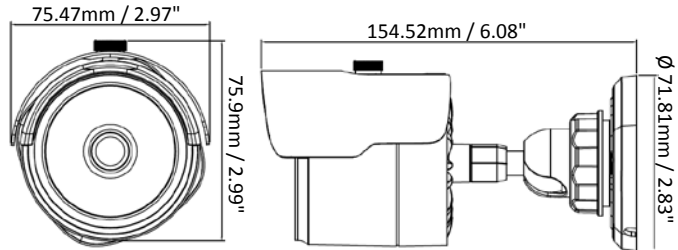

Features

- 2MP Progressive scan CMOS sensor
- Equipped 3.6mm fixed lens
- Multi-streaming from H.265 / H.264
- Supports D-WDR
- Provides True Day/Night functionality with automatic IR filter operation
- Extended IR range up to 30m / 98ft. with 18 LEDs (depends on scene IR reflectivity)
- Supports video analytics
- Supports ONVIF (V17.06, Profile S, Profile G)
- Weather-proof IP66 rated
- Supports live monitoring via mobile Apps (iOS & Android)
- Supports PoE and 12VDC

Optional Accessories

| Model | BA-EACM | BA-EACJ | BA-EACB | BA-EACI | BA-EACA | BA-EACN |
|------------------|--|------------------------------|------------------------------|------------------------------|--------------------------------|------------------------------|
| Image | | | | | | |
| Size (Φ x H) | 100.5 x 77mm / 3.96" x 3.03" | 134 x 77.5mm / 5.28" x 3.05" | 146.7 x 79mm / 5.78" x 3.11" | 134 x 57.5mm / 5.28" x 2.26" | 146.7 x 59mm / 5.78" x 2.32" | 100.5 x 57mm / 3.96" x 2.24" |
| Bracket/ Adaptor | BA-EACF Bracket Holder 27cm / 10.63" | BA-EABZA Bracket | | BA-EAPZA Pole Adaptor | BA-EACZA Corner Adaptor | - |

| | |
|--|---|
| <p>IP Sidekick - ESK1000 The product can assign an IP address to the camera, and then you can connect and check the IP camera live view using our mobile app EF Sidekick.</p> | <p>EverFocus PoE Switch</p> <p>5 Ports: ES0501-40 8 Ports: ES0812-31 / ES0802-41 16 Ports: ES1625-31 / ES1645-51 24 Ports: ES2426-31 / ES2446-51 / ES2448-62</p> |
|--|---|

*All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

*Information contained in this document is subject to change without notice.

| | |
|------------------------|--|
| Model No. | EZN1240-A |
| Pickup Device | 2MP Progressive scan CMOS sensor |
| Lens | 3.6mm fixed lens |
| FOV | H: 81°, V: 44°, D: 95° |
| F No. | F 2.0 ±5% |
| Minimum Illumination | Color: 0.1Lux @ F1.2 (AGC On); B/W: 0Lux @ IR On |
| Day/Night | True Day/Night with ICR |
| Shutter | 1/5 ~ 1/20,000s |
| Video Compression | H.265 / H.264 |
| Max. Video Resolution | 1920 x 1080 |
| Frame Rate | 25fps / 30fps |
| S/N Ratio | ≥ 50db (AGC Off) |
| AGC | Supported |
| Triple Streams | Supported |
| AWB | Supported |
| WDR | D-WDR |
| 3DNR | Supported |
| Video Output | Not supported |
| Audio | Not supported |
| SD Card Slot | Not supported |
| Password Protection | Supported |
| Alarm Input / Output | Not supported |
| Reset Button | Not supported |
| Interface | RJ-45 10M/100M x 1 |
| Supported Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP |
| Connector | DC Jack, RJ-45 |
| Image Settings | Flip, Rotate, Corridor, Saturation, Brightness, Contrast, Hue, Sharpness |
| Video Analytics | Perimeter Intrusion Detection, Line Crossing Detection, Foreign/Missing Object Detection |
| Event Trigger | Motion, Intelligent |
| Notification | Email Notification |
| IR LED | 18 units (SMD) |
| IR Distance | 30m / 98ft. |
| Power Supply | 12VDC |
| Power over Ethernet | PoE IEEE802.3af (Class 3) |
| Max. Power Consumption | 12VDC ≤7W / PoE 5.11W |
| Humidity | ≤95% not condensing |
| Operating Temperature | -30°C ~ 55°C / -22°F ~ 131°F |
| Dimensions (Φ) x (D) | 71.81 x 154.52mm / 2.83" x 6.08" |
| Weight | 349g / 0.77lb |
| Weather Resistance | IP66 |
| Vandal Resistance | Not supported |
| Certificates | CE, FCC, RoHS |

Find Out More At:

EverFocus Taiwan HQ:
 TEL: +886 2 26622338
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus USA - California:
 TEL: +1 626 844 8888
www.everfocus.com
sales@everfocus.com

International Branch Offices:
 China, Japan

