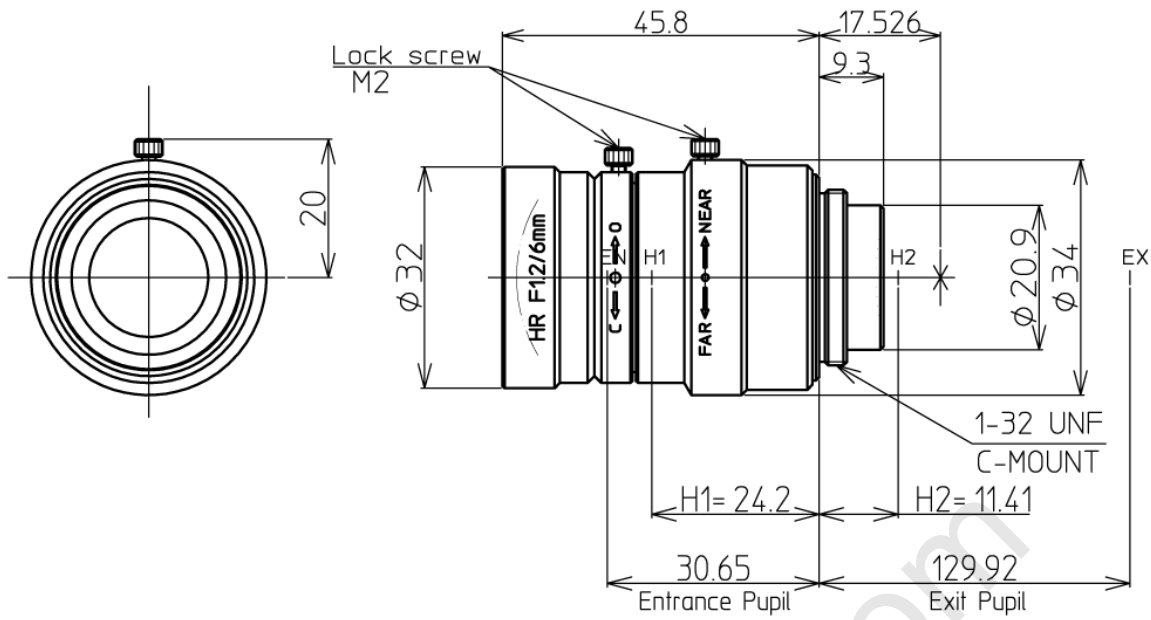

1/2" 1.2/6mm C		1/3"
FOCAL LENGTH	f=6mm	
MAX. DIAMETER (RATIO)	F=1:1.2~Close	
PICTURE SIZE	4.8x6.4mm	3.6x4.8
ANGLE VER. ANGLE	43.5°	33.2°
HOR. ANGLE	56.2°	43.5°
DIA. ANGLE	67.0°	53.2°
DISTORTION (TV)	-0.2%	-0.2%
WORKING DISUTANCE OPTICAL MAGNIFICATION 500mm	-0.012x	
400mm	-0.015x	
300mm	-0.020x	
200mm	-0.039x	
100mm	-0.054x	
MINIMUM FOCUS DISTANCE	0.1m	
FLANGE BACK	17.526 mm in air	
BACK FOCUS	9.3mm in air (Mechanical 8.2mm in air)	
FILTER SCREW SIZE	M30.5x0.5	
FRONT/REAR EFFECTIVE DIA.	Front φ21.1mm Rear φ15.4mm	
MOUNT	C-MOUNT	
EXIT PUPIL	-112mm	
TEMPERATURE RANGE	-10~+50° C	
STORNG TEMPERATURE RANGE	-20~+60° C	
RESOLUTION CENTER/CORNER	Center 120lp/mm Corner 100lp/mm	
WEIGHT	100g	

Kowa

		1/2" F1.2/6mm		
		LM6NCM		
2012.06.21				

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEOSUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com