

# MAXIMUS MPXT

## EXPLOSION-PROOF POSITIONING UNIT WITH BUILT-IN DAY/NIGHT AND THERMAL CAMERAS



### MAIN FEATURES

Electropolished AISI 316L stainless steel explosion proof P&T head  
 ¾" NPT threaded hole for use of cable glands or conduit  
 Variable speed: 0.1°-100°/s Pan and Tilt  
 Extremely easy electrical connections directly into the unit, thanks to the explosion-proof inspection box  
 Dual independent video output  
 Thermal cameras:

- Sensor: Uncooled microbolometer (VOx)
- Lenses: 35mm, 25mm or 19mm
- Resolution 320x256 or 640x512

Day/Night camera 36x or 28x

- True Progressive Scan
- High resolution: up to 550 TVLines
- Advanced image stabilizer (Stable Zoom Mode)
- Day/Night (Auto ICR: automatic removal of IR filter)

Position accuracy: 0.02°

### OPTIONS:

IP based control mode, MPEG4/MJPEG, 25fps, Full D1 (compatible with Milestone XProtect Suite and ONVIF protocol)  
 Prewired ATEX / IECEx certified versions with unarmored cable/barrier cable gland

### DESCRIPTION

These explosion-proof integrated positioning units have been certified and designed to meet the strictest standards regarding installation in potentially explosive environments, given the presence of gas and flammable dusts. The MAXIMUS range ensures excellent performance for monitoring critical processes in areas with risk of explosion, such as refineries, gas pipelines, oil tankers, offshore platforms, industrial processes, chemical industries, etc. This model provides a dual vision in real time, incorporating a Day/Night camera and thermal camera for applications that require a field of view also in complete darkness, fog, rain, smoke or for large distances. The area is always monitored, thanks to the speed and detection accuracy of the target. The IP-based versions with integrated server for compressing analog data of videos and telemetry allow a network integration for a full control of all the PTZ functions via network. These models support the ONVIF protocol and are integrated by Milestone XProtect® Suite. The versions certified ATEX / IECEx are available with optional prewired unarmored cable/barrier cable gland (IEC/EN 60079-14). (Ref. ACCESSORIES: MPXCABL4, 4m, and MPXCABL10, 10m)



MPXT



CABLE INPUT



**TECHNICAL DATA****GENERAL**

AISI 316 stainless steel construction  
 Passivated and electropolished external surfaces  
 Quick configuration and setup  
 Dynamic positioning control system

**MECHANICAL**

1 3/4" NPT hole for cable glands  
 Zero backlash  
 Horizontal rotation: 360° continuous  
 Vertical rotation: -90° to +90°  
 Horizontal speed (variable): from 0.1° to 100°/s  
 Tilt speed (variable): from 0.1° to 100°/s  
 Preset accuracy: 0.02°  
 12mm thick tempered glass window  
 8mm thick germanium window  
 Integrated wiper  
 Unit weight: 31kg (68lb)

**ELECTRICAL**

Input voltage:
 

- 230Vac, 50/60Hz, 120W max
- 24Vac, 50/60Hz, 120W max
- 120Vac, 50/60Hz, 120W max

 2 video outputs 75 Ohm 1Vpp (PAL/NTSC)  
 Functions: Autopan, Preset, Patrol, Tour (maximum 3), Autoflip  
 Maximum number of presets for protocol
 

- VIDEOTECH MACRO: 250
- ERNITEC: 250
- PANASONIC: 250
- PELCO D: 99
- AMERICAN DYNAMICS: 95

 16-character string for zone and preset titling  
 I/O alarm card:
 

- 5 alarm inputs
- 2 relay outputs (1A 30Vac/60Vdc max)

**COMMUNICATIONS**

Configuration through OSD  
 2 half-duplex serial RS-485 interfaces or full-duplex RS-422  
 Firmware updating from console in remote mode (only VIDEOTECH MACRO and PELCO D protocols)  
 Up to 999 units, addressable by means of dip-switches  
 MPXT, IP based control mode:
 

- Connection Ethernet port LAN 10/100T

**PROTOCOLS**

AMERICAN DYNAMICS, ERNITEC, PANASONIC, PELCO D, VIDEOTECH MACRO\*

AMERICAN DYNAMICS, ERNITEC, PANASONIC, PELCO are registered trademarks.

*The product may be interfaced with devices not manufactured by VIDEOTECH. It is possible that the interface protocols have changed or are in a different configuration from earlier tested units by VIDEOTECH. VIDEOTECH recommends a test prior to installation. VIDEOTECH will not be liable for any installation costs or lost revenues in the event a compatibility problem will occur.*

MPXT, IP based control mode:

- Compression MPEG-4/MJPEG
- Picture resolution:
- Full D1 (720x576)
- VGA (640x480)
- CIF (352x288)
- Image frame rate max 25fps at Full D1
- Web Server

**ENVIRONMENT**

Indoor/Outdoor  
 Operating temperature: -40°C (-40°F)/+60°C (140°F)  
 Surge immunity: up to 2kV line to line, up to 4kV line to earth (Class 4)

**CERTIFICATIONS**

ATEX (EN 60079-0: 2009, EN 60079-1: 2007, EN 60079-31: 2009)
 

- Ex d IIC T<sub>6</sub> T<sub>10</sub> -40°C to +60°C Gb
- Ex tb IIIC T85°C T<sub>10</sub> -40°C to +60°C Db
- IP66

 IECEx (IEC 60079-0: 2007, IEC 60079-1: 2007, IEC 60079-31: 2008)
 

- Ex d IIC T<sub>6</sub> T<sub>10</sub> -40°C to +60°C Gb
- Ex tb IIIC T85°C T<sub>10</sub> -40°C to +60°C Db
- IP66

 GOST-R
 

- 1 Ex d IIC T<sub>6</sub> Gb X
- Ex tb IIIC T85°C Db X
- IP66

 CNEx
 

- Ex d IIC T<sub>6</sub> Gb Tamb-40~60°C
- DIP A21 TA T<sub>6</sub> Tamb-40~60°C

 INMETRO
 

- Ex d IIC T<sub>6</sub> Gb Ta -40°C a/to +60°C
- Ex tb IIIC T85°C Db Ta -40°C a/to +60°C
- IP66

 cULus Listed, Type 4X (only for 24Vac version)  
 UL listed for USA (only for 24Vac version):
 

- Class I, Zone 1, AEx d IIC T<sub>6</sub>
- Zone 21, AEx tb IIIC T85°C

 UL listed for Canada (only for 24Vac version):
 

- Class I, Zone 1, Ex d IIC T<sub>6</sub> Gb
- Class II, Groups E, F and G

**BRACKETS AND ADAPTORS**

MPXWBA	AISI 316L stainless steel wall bracket
MPXCW	AISI 316L stainless steel corner adapter module
MPXCOL	AISI 316L stainless steel pole adapter module
MPXWBTA	AISI 316L stainless steel parapet or ceiling mounting bracket

**ACCESSORIES**

WASEX2T4AT	Tank 10l with integrated manual pump controlled by ATEX certified solenoid-valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc
WASEX2T4GOR	Tank 10l with integrated manual pump controlled by GOST-R certified solenoid-valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc
WASEX2T4IN	Tank 10l with integrated manual pump controlled by INMETRO certified solenoid-valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc

OCTEXA3/4C	Cable gland with gasket EX 3/4" NPT, armoured cable IECEX-ATEX-GOST
OCTEX3/4C	Cable gland with gasket EX 3/4" NPT, unarmoured cable IECEX-ATEX-GOST
OCTEXB3/4C	Barrier cable gland 3/4" NPT, unarmoured cable IECEX-ATEX-GOST
OCTEXBA3/4C	Barrier cable gland 3/4" NPT, armoured cable IECEX-ATEX-GOST
OCTEX3/4	Cable gland with gasket EX 3/4" NPT, unarmoured cable ATEX
OCTEXA3/4	Cable gland with gasket EX 3/4" NPT, armoured cable ATEX
MPXCABL4	Cabling for MPX/MPXT, 4m (157.5in) (unarmoured cable and barrier cable gland): 2 ethernet cables, 3 power supply wires, 2 coaxial video cables, 15 wires for relays alarms and telemetry
MPXCABL10	Cabling for MPX/MPXT, 10m (394in) (unarmoured cable and barrier cable gland): 2 ethernet cables, 3 power supply wires, 2 coaxial video cables, 15 wires for relays alarms and telemetry

**PACKAGE**

Model Number	Weight	Dimensions (WxHxL)	Master carton
MPXT1QAW000A	35kg (77lb)	54x31x49cm	-

**MAXIMUS MPXT - CONFIGURATION OPTIONS**

	Voltage	Day/Night camera	Thermal Camera			Video output	Thermal camera frame rate
<b>MPXT</b>	<b>1</b> 230Vac	<b>P</b> Day/Night camera 36x optical zoom lens, PAL	<b>A</b> Thermal camera 35mm, 320x256	<b>W</b> With wiper	<b>0</b>	<b>0</b> Analog control mode	<b>00A</b> - 7.5-8.3Hz
	<b>2</b> 24Vac	<b>Q</b> Day/Night camera 28x optical zoom lens, PAL	<b>B</b> Thermal camera 25mm, 320x256			<b>X</b> IP MPEG4 control mode	<b>H</b> 25-30Hz
	<b>3</b> 120Vac	<b>N</b> Day/Night camera 36x optical zoom lens, NTSC	<b>V</b> Thermal camera 19mm, 320x256				
		<b>M</b> Day/Night camera 28x optical zoom lens, NTSC	<b>D</b> Thermal camera 35mm, 640x512				
			<b>E</b> Thermal camera 25mm, 640x512				

**3/4" NPT CABLE GLAND SELECTION LAYOUT**

Zone, Gas	Cable gland type	Certification	Operating temperature	Cable	Cable glands part code	Diameter of the external cable	Under armor cable diameter
IIC, Zone 1 or Zone 2 IIB or IIA, Zone 1	Barrier	IECEX/ATEX/GOST	From -60°C (140°F) to +80°C (+176°F)	Not armored	OCTEXB3/4C	From 13mm (0.5in) to 20.2mm (0.8in)	-
				Armored	OCTEXBA3/4C	From 16.9mm (0.7in) to 26mm (1in)	-
IIB or IIA, Zone 2	With gasket	IECEX/ATEX/GOST	From -60°C (140°F) to +100°C (212°F)	Not armored	OCTEX3/4C	From 13mm (0.5in) to 20.2mm (0.8in)	-
				Armored	OCTEXA3/4C	From 16.9mm (0.7in) to 26mm (1in)	From 11.1mm (0.4in) to 19.7mm (0.8in)
		ATEX	From -20°C (-4°F) to +80°C (+176°F)	Not armored	OCTEX3/4	From 14mm (0.6in) to 17mm (0.7in)	-
				Armored	OCTEXA3/4	From 18mm (0.7in) thick glass to 23mm (0.9in)	From 14mm (0.6in) to 17mm (0.7in)




CAMERA FEATURES				
	SONY Day/Night 36x		SONY Day/Night 28x High sensitivity	
	PAL	NTSC	PAL	NTSC
Optical zoom	36x		28x	
Wide Dynamic Range (Fix/Auto)	✓		-	
True progressive SCAN	✓		-	
Digital image stabilisation	✓		✓	
White balance	Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)		Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)	
High horizontal resolution	Up to 550 TV Lines		Up to 550 TV Lines	
Day/Night (Auto ICR)	✓		✓	
Image Sensor	1/4" EXView HAD CCD		1/4" Super HAD CCD II	
Number of effective Pixels	~ 440000 pixel	~ 380000 pixel	~ 440000 pixel	~ 380000 pixel
Min. Color illumination (IR-Cut Filter = OFF)	1.4Lux / 1/50s 0.1 Lux / 1/3s	1.4Lux / 1/60s 0.1 Lux / 1/4s	0.25Lux / 1/50s 0.16 Lux / 1/3s	0.25Lux / 1/60s 0.16 Lux / 1/4s
Min. B/W illumination	0.01 Lux / 1/3s	0.01 Lux / 1/4s	0.0015 Lux / 1/3s	0.0015 Lux / 1/4s
"Shutter Time" automatic increase to improve the night surveillance	✓		✓	
S/N ratio	Greater than 50dB		Greater than 50dB	
AE control	Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual		Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual	
Back light compensation	On/Off		On/Off	
Spherical masking (3D) of Privacy zones with automatic upgrade	✓		✓	
Privacy Zone Masking	On/Off (24 positions)		On/Off (24 positions)	
Maximum number of masking blocks to be displayed	8		8	
Resolution of masking blocks	160x120 HxV		160x120 HxV	
Masking	Up to 15 different masking types: 14 colour types or mosaic		Up to 15 different masking types: 14 colour types or mosaic	
Focusing system	Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual		Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual	
"Smart" lens control	SONY Modular Automatic Lens Reset Technology		SONY Modular Automatic Lens Reset Technology	
High Zoom and Wide Horizontal Field of View Capability	✓		✓	
Optical zoom	36x, f=3.4 (wide) to 122.4mm (tele) / F1.6 to F4.5		28x, f=3.5 (wide) to 98mm (tele) / F1.35 to F3.7	
Digital Zoom	12x (432x with optical zoom)		12x (336x with optical zoom)	
Angle of view (A)	57.8 degrees (wide) to 1.7 degrees (tele)		55.8 degrees (wide) to 2.1 degrees (tele)	
Minimum object distance	320mm (12.6in) (wide) to 1500mm (59.1in) (tele)		10mm (0.4in) (wide) to 1500mm (59.1in) (tele)	
Electronic Iris Speed	1/1 ÷ 1/10000s		1/1 ÷ 1/10000s	

SONY is a registered trademark of SONY Corporation, Japan. EXView HAD is a registered trademark of SONY Corporation.

THERMAL CAMERAS AVAILABLE (RESOLUTION 320X256)						
	Lens 35mm		Lens 25mm		Lens 19mm	
	PAL	NTSC	PAL	NTSC	PAL	NTSC
Image sensor	Uncooled VOx microbolometer		Uncooled VOx microbolometer		Uncooled VOx microbolometer	
Resolution	320x256	320x240	320x256	320x240	320x256	320x240
Pixel dimensions	25µm		25µm		25µm	
Spectral response - long wave infrared (LWIR)	from 7.5µm to 13.5µm		from 7.5µm to 13.5µm		from 7.5µm to 13.5µm	
Internal shutter (only for sensor compensation)	Video stop < 1sec.		Video stop < 1sec.		Video stop < 1sec.	
Digital Detail Enhancement (DDE)	✓		✓		✓	
Digital Zoom	2x, 4x		2x, 4x		2x, 4x	
Image updating frequency	8.3fps	7.5fps	8.3fps	7.5fps	8.3fps	7.5fps
Image updating high frequency	25fps	30fps	25fps	30fps	25fps	30fps
Scene temperature range	-40°C ÷ +160°C (-40°F ÷ +320°F)		-40°C ÷ +160°C (-40°F ÷ +320°F)		-40°C ÷ +160°C (-40°F ÷ +320°F)	
Horizontal field of view	13°		18°		24°	
Vertical field of view	10°		14°		18°	
F-number	F/1.2		F/1.1		F/1.25	
Thermal sensitivity (NEΔT)	< 50mK a f/1.0		< 50mK a f/1.0		< 50mK a f/1.0	
Person (detection / recognition / identification)	800m / 200m / 105m		590m / 148m / 75m		450m / 112m / 56m (1476ft / 367ft / 184ft)	
Auto (detection / recognition / identification)	2250m / 590m / 290m (7382ft / 1936ft / 951ft)		1650m / 430m / 215m (5413ft / 1411ft / 705ft)		1280m / 330m / 165m (4199ft / 1083ft / 541ft)	

THERMAL CAMERAS AVAILABLE (RESOLUTION 640X512)				
	Lens 35mm		Lens 25mm	
	PAL	NTSC	PAL	NTSC
Image sensor	Uncooled VOx microbolometer		Uncooled VOx microbolometer	
Resolution	640x512	640x480	640x512	640x480
Pixel dimensions	17µm		17µm	
Spectral response - long wave infrared (LWIR)	from 7.5µm to 13.5µm		from 7.5µm to 13.5µm	
Internal shutter (only for sensor compensation)	Video stop < 1sec.		Video stop < 1sec.	
Digital Detail Enhancement (DDE)	✓		✓	
Digital Zoom	2x, 4x		2x, 4x	
Image updating frequency	8.3fps	7.5fps	8.3fps	7.5fps
Image updating high frequency	25fps	30fps	25fps	30fps
Scene temperature range	-40°C ÷ +160°C (-40°F ÷ +320°F)		-40°C ÷ +160°C (-40°F ÷ +320°F)	
Horizontal field of view	18°		25°	
Vertical field of view	14°		20°	
F-number	F/1.2		F/1.1	
Thermal sensitivity (NEΔT)	< 50mK a f/1.0		< 50mK a f/1.0	
Person (detection / recognition / identification)	1140m / 280m / 142m (3740ft / 919ft / 466ft)		820m / 210m / 104m	
Auto (detection / recognition / identification)	3000m / 800m / 200m (9843ft / 2625ft / 656ft)		2200m / 580m / 290m (7218ft / 1903ft / 951ft)	

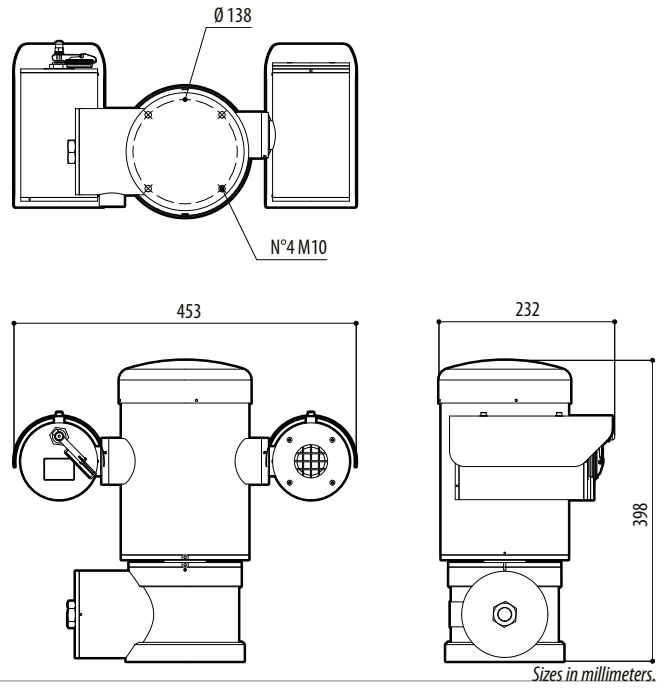

MAXIMUS MPXT