


Product Features

- Metal frame & Metal case
- PIP Control Function (Only PC/Video) [Video/Video option]
- Screen protector (Anti-blur /Image auto move)
- NTSC/PAL Auto Switch
- 3D Comb Filter Technology. 3D De-interlace Technology
- Automatic Color Control and Color Killer
- Luminance transient improvement (LTI), Chrominance transient improvement (CTI)
- Build-in 2W speaker, Support IR remote controller
- VESA standard bracket

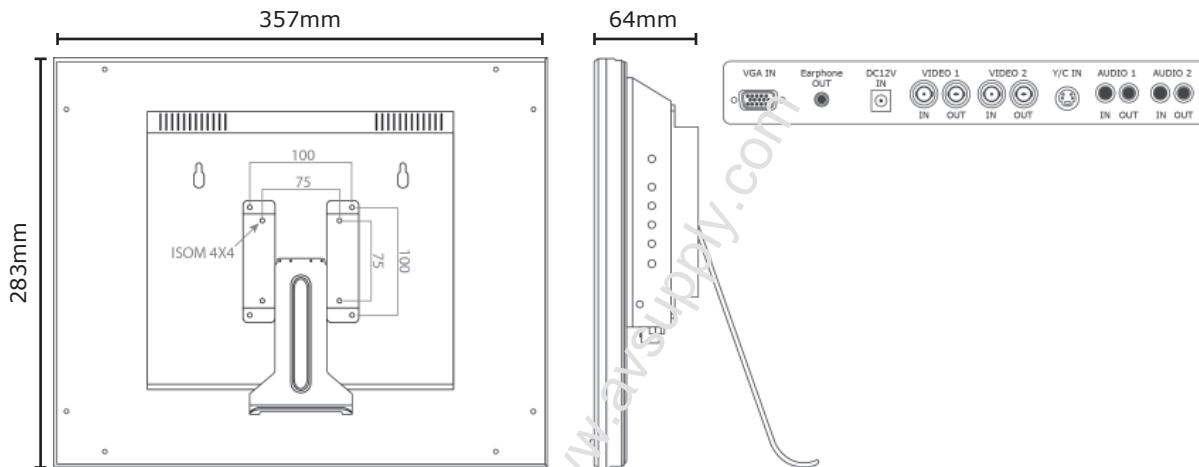

Technical Specifications

Electrical	
Operating System	45M15-1 NTSC / PAL
Picture Size	15" diagonal
Active Area	304mm x 228mm
Aspect Ratio	4 : 3
Max. Resolution	1024 x 768
Pixel Dot Pitch	0.297mm x 0.297mm
Colors	16.7M
Brightness	250 cd/m ²
Contrast	600 :1
Response Time	6/2 ms
View Angle (U/D/L/R)	80°/80°/80°/80°
3D Comb Filter	Yes
3D De-Interlace Function	Yes
Picture-in-Picture (PIP)	Yes (video/PC)
OSD Setting	Yes
Power Input	100-240V AC 50/60Hz, Adapter 12V DC / 5A
Power Consumption	Approx. 21 watt

Environmental

Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% R.H.

Mechanical

Dimensions W x H x D	357mm x 283mm x 64mm (14" x 11" x 2.5")	
Weight	3.2 Kg (7 lbs)	
Connectors	Video	2 Composite BNC inputs/output, 1 S-video, 1 4-pin Mini DIN
	Audio	2 RCA input/output, 1 Ø3.5mm jack input
	PC	1 15-pin D-sub connector (VGA)
	Speaker	1x built-in speaker (2 watt)

Accessories

Included	1	Power supply unit 12VDC
	1	Power cord
	1	15 pin D-sub (VGA cable)
	1	Remote control
	1	User Manual