

SL112 Coaxial Spot Light




- 4i** Designed to replace fiber optic light sources in coaxial microscopes
- 4i** Compact light head provides efficient thermal management to promote long LED life.
- 4i** Optional Couplers available for use with Dolan-Jenner, Fostec, and Moritex fiber bundles - see the CP112 page in Accessories

Ordering Information

Standard Product:
Shipped Next Day
SL112-WHIIC


Configured with the inline current source.

Standard Product Variation:
Shipped Within Two Weeks

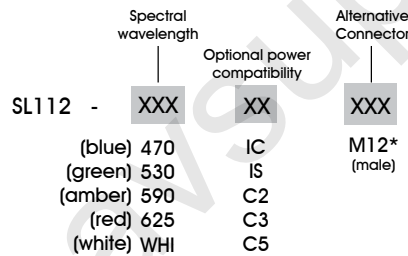

IC = iCS (requires 24v power supply)
IS = iSU (requires 24v power supply)
C2 = Ai Connector
C3 = Pulsar 710 Connector
C5 = Pulsar 320 Connector
* Available with IC and IS options only

Dimensional Information

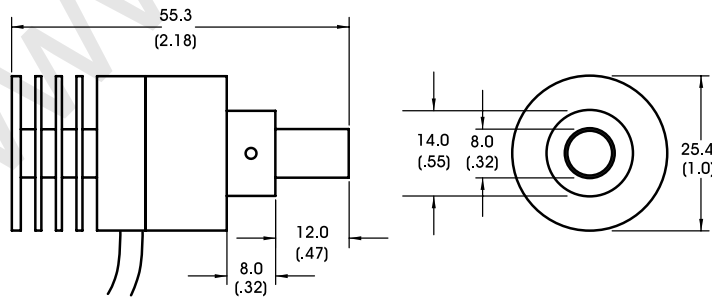

[Click for Installation Models & Drawings](#)

[To View the Fiber Optic Coupler Page Click Here](#)

Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@24	500	500	500	350	500	500	mA

Standard Product Information

Weight:	28.4 g (1 oz)
Finish:	Black Anodized
Operating Temperature:	0-60° C
Meets Specifications:	CE RoHS