

SDI Coaxial Remote (COAXITRAN) Controller SSD-RX010, SSD-RX010N



FEATURES


- SDI Standards 3G-SDI (SMPTE 424M) & HD-SDI(SMPTE 292M)
- Real-time High Quality Digital Video Transmission ; OSD Control
- Support 3G-SDI (SMPTE 424M), HD-SDI (SMPTE 292M)
- SDI BNC Input Connector x1, SDI BNC Output Connector x1
- Support SDI: Full HD 1080P/HD 720P@25/30/50/60fps, HD 1080i@50/60fps
- Support HDMI: Full HD 1080P@25/30/50/60fps, HD 720P@25/30/50/60fps
- Coaxitron Techology, Coaxial Cable Video & Control Transmission
- SSD-RX010N with Network Function



SSD-RX010
SDI Receiver
without PoC



SSD-RX010N
SDI IP Receiver
without PoC

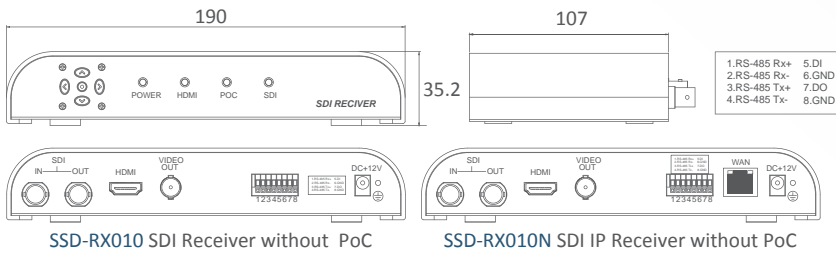

SPECIFICATIONS

Tol:±0.5 Unit:mm

	SSD-RX010	SSD-RX010N
SDI Standards	3G-SDI (SMPTE 424M), HD-SDI (SMPTE 292M)	
Cable Transmission Distance	120 meter (Recommend 5C-FB or RG59 Cable)	
SDI Input	SDI BNC Input Connector x1	
PoC Technology	Video / Control	
SDI Resolution	Full HD 1080P@25/30/50/60fps, HD 1080i@50/60fps, HD 720P@25/30/50/60fps	
SDI Output	SDI BNC Output Connector x1	
HDMI Resolution	Full HD 1080P@25/30/50/60fps, HD 720P@25/30/50/60fps	
HDMI Output	HDMI(1.3a)Type A connector (Output) x1	
Analog Video Output	BNC connector (1.0Vp-p Composite, 75Ω) x1	
Audio Input	NA	
Audio Output	NA	
RS-485 Input	RS-485 +/-	
RS-485 Output	RS-485 +/-	
DI/DO	DIx1 / DOx1	
Ethernet	NA	10/100M Auto Negotiation
Video compression	NA	H.264, MPEG4, M-JPEG
H.264	NA	H.264 HighProfile
Bit Rate Transmission	NA	1920x1080/1280x1024/1280x960/1280x720@30fps
Power Supply	12Vdc ; 3W	12Vdc ; 5.4W
Operating ; Storage Temp.	Silver, 190(W)x35.2(H)x107(L)mm	
Operation ; Storage Humidity	-10°C~50°C ; -20°C~60°C	
Dimensions	Maximum: RH80% ; RH90%	
Net Weight	490g	520g

*Specifications are unfixed and do not apply to customized projects. 130728

SYSTEM APPLICATIONS

