


### FEATURES

- SDI Standards 3G-SDI (SMPTE 424M) & HD-SDI(SMPTE 292M)
- Real-time High Quality Digital Video Transmission ; OSD Control
- Support 3G-SDI (SMPTE 424M), HD-SDI (SMPTE 292M)
- SDI BNC Input Connector x1, SDI BNC Output Connector x1
- Support SDI: Full HD 1080P/HD 720P@25/30/50/60fps, HD 1080i@50/60fps
- Support HDMI: Full HD 1080P@25/30/50/60fps, HD 720P@25/30/50/60fps
- Exclusive One Cable Technology, One Cable Transmission(Video/Audio/Power/Control)
- SSD-RX011N with Network Function

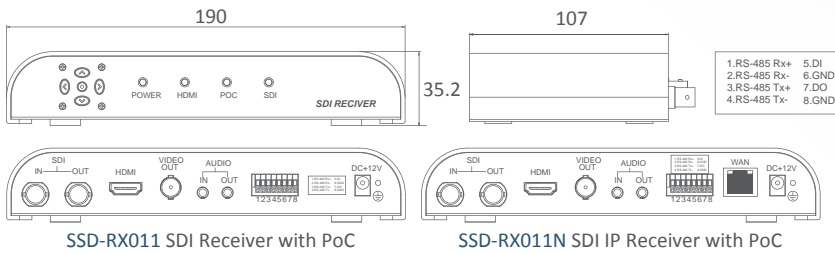

### SPECIFICATIONS

Tol:±0.5 Unit:mm

|                              | SSD-RX011   | SSD-RX011N                                  |
|------------------------------|---|---|
| SDI Standards                | 3G-SDI (SMPTE 424M), HD-SDI (SMPTE 292M)                                |   |
| Cable Transmission Distance  | 120 meter (Recommend 5C-FB or RG59 Cable)                               |   |
| SDI Input                    | SDI BNC Input Connector x1  |   |
| PoC Technology               | Video/Audio/Power/Control   |   |
| SDI Resolution               | Full HD 1080P@25/30/50/60fps, HD 1080i@50/60fps, HD 720P@25/30/50/60fps |   |
| SDI Output                   | SDI BNC Output Connector x1   |   |
| HDMI Resolution              | Full HD 1080P@25/30/50/60fps, HD 720P@25/30/50/60fps                    |   |
| HDMI Output                  | HDMI(1.3a)Type A connector (Output) x1                                  |   |
| Analog Video Output          | BNC connector (1.0Vp-p Composite, 75Ω) x1                               |   |
| Audio Input                  | Audio In (3.5mm) x1   |   |
| Audio Output                 | Audio out (3.5mm) x1  |   |
| RS-485 Input                 | RS-485 +/-  |   |
| RS-485 Output                | RS-485 +/-  |   |
| DI/DO                        | DIx1 / DOx1   |   |
| Ethernet                     | NA  | 10/100M Auto Negotiation                    |
| Video compression            | NA  | H.264, MPEG4, M-JPEG                        |
| H.264                        | NA  | H.264 HighProfile                           |
| Bit Rate Transmission        | NA  | 1920x1080/1280x1024/1280x960/1280x720@30fps |
| Power Supply                 | 12Vdc ; 3W (Enable PoC: Max.10W)  | 12Vdc ; 5.4W (Enable PoC: Max.15.4W)        |
| Operating ; Storage Temp.    | Black, 190(W)x35.2(H)x107(L)mm  |   |
| Operation ; Storage Humidity | -10°C~50°C ; -20°C~60°C   |   |
| Dimensions                   | Maximum: RH80% ; RH90%  |   |
| Net Weight                   | 490g  | 520g  |

\*Specifications are unfixed and do not apply to customized projects. 130728

### SYSTEM APPLICATIONS

